

VX-820/870 SERIES

VHF · UHF Portable Radios

IP54
Splash Proof

IP55
Water Proof

IP57
Submersible
3 feet for 30 min.

VX-820 Series

IP65
Water Proof

IP67
Submersible
3 feet for 30 min.

IP68
Super Submersible
6 feet for 3 hrs.

VX-870 Series / Special Order Version

IS

Special Order Feature
Intrinsically Safe Version Available



VX-829/879

512 ch/32 groups with 16 Keys and LCD

VX-824/874

512 ch/32 groups with 4 Keys and LCD

VX-821/871

16 ch/1 group without LCD

VERSATILITY

VX-829/824/879/874 with LCD:
Maximum 512 Channels / 32 Groups
VX-821/871 w/o LCD: Maximum 16 Channels / 1 Group

The LCD-equipped version provides massive channel storage capability: up to 512 channels may be programmed into as many as 32 groups. A single radio may therefore be programmed with channel sets for a number of different jurisdictions or organizations, ensuring seamless interoperability. The VX-820/870 Series without the LCD can accommodate up to 16 channels in a single memory group.

CTCSS / DCS Encode and Decode

High-performance Encoder/Decoder circuits for both CTCSS and Digital Code Squelch are provided, for access to tone/code controlled systems. DCS is ideal for crowded RF environments, providing superior immunity from false opening of the squelch.

DTMF ANI / DTMF Paging (optional FVP-25 required for DTMF Paging)

Fleet and network operation are enhanced by the built-in DTMF ANI circuit.

2-Tone Encode and Multiple 2-Tone Decode

The VX-820/870 Series can transmit a 2-Tone paging call, and can receive 2-Tone calls using different tone combinations.

User Selectable Tone (VX-829/824/879/874)

One of the front panel's "programmable" keys may be designated so as to allow the user to select a CTCSS or DCS tone from a pre-defined Tone Table.

Scan: Channel Scan, Priority Scan, Dual Watch, Follow-me Scan, Follow-me Dual Watch, and TA Scan

The VX-820/870 Series provides unmatched flexibility in its scanning features. Designed to optimize operation in a wide variety of system environments, these scanning capabilities ensure that you never miss an important call!

Comander (Wide and Narrow Band)

For operation in systems requiring Companding, the VX-820/870 Series portables include both Wide- and Narrow-band Companding circuitry, programmable channel by channel.

Lone Worker

The Lone Worker feature is designed to emit an alarm for 30 seconds when the Lone Worker Timer (programmed by the dealer) has expired. If the user does not reset the timer by pressing the PTT switch, the radio switches to the Emergency mode.

RX/TX Battery Saver

When engaged, the Receive-mode Battery Saver rapidly pulses the portable on and off, reducing current consumption and extending battery life. If a call is received, the Battery Saver is disengaged, and normal operation resumes. On transmit, the Battery Saver will reduce transmitter power, thus extending operating time, when you are within close range of a strong repeater or dispatch center.

Programmable Function Keys

Customization of feature access is easily accomplished at the time of programming, thanks to the "programmable" keys that may be assigned functions needed most in your operating environment.



PC Programmable

All channel and other configuration data may be uploaded to the portable by the dealer in a matter of minutes, allowing efficient setup of a fleet of radios when rapid deployment is required.

ANI Encoding and Decoding (MDC-1200®, GE-Star®, and DTMF (Encode): optional VME-100 or VMDE-200 required)

Automatic Number Identification, triggered by the pressing of the PTT key, is available in the most popular industry-standard formats, via the optional VME-100 (for Encoding only) or VMDE-200 (for Encoding and Decoding) module.

DURABLE CONSTRUCTION

Rugged, Submersible Design

The VX-820 Series portables are housed in an ultra-rugged, impact-resistant case that is designed to exceed U.S. MIL-STD 810C/D/E/F standards for shock, vibration, and driving rain; it also meets international waterproofing standard IP55 (water jets) and IP57 (submersion in water to a depth of 3 feet for up to 30 minutes).



IP68
Super Submersible
6 feet for 3 hrs

VX-870 Series
Special Order Version

For even more demanding environments, the VX-870 Series version meets IP68 specifications (submersion to 6 feet for 3 hours), and is available via special order.

Submersible External Speaker/Microphone MH-66 Series (optional)

When operating in an emergency situation where immersion of the radio and/or its accessories could occur, the optional MH-66 Series Speaker/Microphone is rated to the same submersibility specifications as the portable itself (IP57), ensuring that your essential communications won't be interrupted if the microphone gets dropped into the water.

HIGH PERFORMANCE

Power Output: 5 W

The VX-820/870 Series provides up to five solid Watts of transmitter power, for extended communications range. For more localized applications, the power output may be reduced to 2.5 W, 1 W, or 1/4 W, for enhanced battery life.

Wide / Narrow (12.5 / 20 / 25 kHz programmable per channel)

When programming radios for use in different jurisdictions, the VX-820/870 Series portables may be set up, channel by channel, for use in 12.5 kHz, 20 kHz, or 25 kHz channel spacing environments. Deviation and bandwidth are automatically set according to the configuration you choose.

Built-in 5-Tone signaling

For advanced network or fleet operations, a 5-Tone Encoder-Decoder circuit is included in the VX-820/870 Series. An expensive option on many competing brands, this included feature enhances operation without impacting your budget.

Loud 700 mW Audio Output

Ideal for reception in noisy environments, high-powered audio of the VX-820/870 Series is coupled to a large internal speaker, assuring solid copy throughout difficult crowd control, fire, or sporting-event operations.

Speed Dial (16-key version only)

An easy-to-use DTMF Speed Dialer feature is included in the VX-829/879, for specialized selective calling, telephone interconnect, or other applications.




Voice Storage (Optional DVS-5 required)

The optional DVS-5 Digital Voice Storage Unit allows you to store and play back up to 120 seconds of incoming received audio, so you can archive an important incoming message.

EASY USER INTERFACE

Large LCD (Dot Matrix / 12 Characters +7 Segments / 3 Characters) (VX-829/824/879/874)

The large, easy-to-read display includes a 12-character dot matrix that provides a wealth of information about the operating channel, as well as various status icons. Illuminated using Vertex Standard's renowned Omni-Glow™ back-lighting, the VX-829/ 824/879/874's LCD is clearly visible at night, with minimal degradation of your night vision.

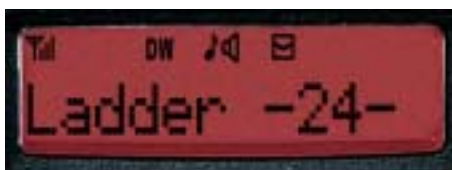

7-Color LED for Incoming Call Alert

The front panel of the VX-820/870 Series includes an ultra-bright LED that can display up to seven different colors, with a variable flash pattern, to alert the operator when a 2-Tone or 5-Tone call has come in, and during Emergency mode operation.



Programmable Home Channel Function

The user may select, out of the dealer-programmed channel list, one channel to be the "Home" channel, which may be assigned to a "programmable" key for one-touch access to a critically-important channel.

Direct Channel Recall (#1 - #4)

Any or all of the programmable keys may be assigned as direct-access one-touch keys for selecting important operating channels.

ARTS™ (Auto-Range Transpond System)

The ARTS™ feature is a "handshake" system that uses DCS coding to confirm that two ARTS™-equipped units are within communication range. If an "out of range" condition develops, an alarm will sound and the communication center can instruct the field unit to move to a better location (or assistance to the field unit can be dispatched).

SECURITY

BCLO / BTLO and TOT

To prevent interference to other users on busy channels, the Busy Channel Lock-Out (BCLO) and Busy Tone Lock-Out (BTLO) features prevent transmission by the portable if the channel is occupied. And the Time-Out Timer (TOT) feature will automatically cut off transmission if the programmed maximum transmit time is exceeded.

Remote Radio Stun / Kill / Revive (5-Tone)

To prevent use of the portable by an unauthorized operator (in case of theft, non-payment of subscription, etc.), a dispatch center can send a 5-Tone command to "Stun" (temporary disabling) or "Kill" (permanent disabling) a unit. If the "Stun" command has been sent, another 5-Tone "Revive" command may also be sent, re-enabling operation of the portable.

Encryption (Optional FVP-35/36 or FVP-25 required)
















The FVP-35 and FVP-36 Encryption Units provide security for your important public safety and security communications. A DTMF Paging function is also included in the FVP-25 module, for selective calling.

Other Features

•AF Minimum Volume •Radio-to-Radio Cloning •Signal Strength Meter •Battery Indicator •Audio Pitch Control

Accessories & Options

VX-820/870/P820/P870 Series

																																									
<p>MH-50D7A Speaker/Microphone</p>	<p>MH-66A7A MH-66B7A w/PF key, Toggle Submersible External Microphone</p>	<p>VH-121 3-Wire Earpiece, Mic, Palm PTT Switch</p>	<p>VH-131 2-Wire Earpiece, Palm Mic/PTT Combo</p>																																						
																																									
<p>VH-111 Over the Head, Heavy Duty Headset</p>	<p>FVP-36 Inversion Encryption Unit (VX-820/870)</p>	<p>FVP-35 Rolling Code Encryption Unit (VX-820/870)</p>	<p>VMDE-200 MDC1200®/GE-STAR® ANI Encoder/Decoder Unit (VX-820/870)</p>																																						
																																									
<p>VME-100 MDC1200®/GE-STAR® ANI Encoder Unit (VX-820/870)</p>	<p>FVP-25 Encryption/DTMF Pager Unit (VX-820/870)</p>	<p>MDC1200 Digital ANI Encode Unit (VX-820/870)</p>	<p>DVS-5 Voice Storage Unit (VX-820/870)</p>																																						
																																									
<p>VAC-920B/C* Desktop Rapid Charger for FNB-V86LI, FNB-V87LI, FNB-V92LI/IS</p>	<p>VAC-6920B/C* 6-Unit Multi Charger for FNB-V86LI, FNB-V87LI, FNB-V92LI/IS</p>	<p>FNB-V92LI/IS 7.4 V 3000 mAh Li-Ion Battery IS : Intrinsically Safe Version</p>	<p>FNB-V87LI 7.4 V 2000 mAh Li-Ion Battery</p>																																						
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td rowspan="2" style="text-align: center;">Programming Cable</td> <td style="text-align: center;">USB</td> <td colspan="2" style="text-align: center;">FIF-10/A + CT-108</td> </tr> <tr> <td style="text-align: center;">RS-232C</td> <td colspan="2" style="text-align: center;">CT-29 + CT-115</td> </tr> <tr> <td style="text-align: center;">Programming Software</td> <td colspan="3" style="text-align: center;">CE59 (VX-820/870)/CE76 (VX-P820/P920)</td> </tr> </tbody> </table>		Programming Cable	USB	FIF-10/A + CT-108		RS-232C	CT-29 + CT-115		Programming Software	CE59 (VX-820/870)/CE76 (VX-P820/P920)																													
Programming Cable	USB	FIF-10/A + CT-108																																							
	RS-232C	CT-29 + CT-115																																							
Programming Software	CE59 (VX-820/870)/CE76 (VX-P820/P920)																																								
<p>FNB-V86LI 7.4 V 1150 mAh Li-Ion Light-Duty Battery</p>	<p>FBA-34 Alkaline Battery Case (6XAA)</p>	<p>■ ANTENNA LIST</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td rowspan="3" style="text-align: center;">UHF</td> <td style="text-align: center;">ATU-6A</td> <td colspan="3" style="text-align: center;">400-430 MHz</td> </tr> <tr> <td style="text-align: center;">ATU-6D</td> <td colspan="3" style="text-align: center;">450-485 MHz</td> </tr> <tr> <td style="text-align: center;">ATU-6DS</td> <td colspan="3" style="text-align: center;">450-485 MHz/3.5"</td> </tr> <tr> <td rowspan="6" style="text-align: center;">VHF</td> <td style="text-align: center;">ATV-6A</td> <td style="text-align: center;">134-151 MHz/3.5"</td> <td style="text-align: center;">ATV-8C</td> <td style="text-align: center;">161-174 MHz</td> </tr> <tr> <td style="text-align: center;">ATV-6B</td> <td style="text-align: center;">150-163 MHz/3.5"</td> <td style="text-align: center;">ATV-10A</td> <td style="text-align: center;">145-155 MHz HIGH GAIN</td> </tr> <tr> <td style="text-align: center;">ATV-6C</td> <td style="text-align: center;">161-174 MHz/3.5"</td> <td style="text-align: center;">ATV-10B</td> <td style="text-align: center;">150-160 MHz HIGH GAIN</td> </tr> <tr> <td style="text-align: center;">ATV-6XL</td> <td style="text-align: center;">VHF UNTUNED</td> <td style="text-align: center;">ATV-10C</td> <td style="text-align: center;">155-165 MHz HIGH GAIN</td> </tr> <tr> <td style="text-align: center;">ATV-8A</td> <td style="text-align: center;">134-151 MHz</td> <td style="text-align: center;">ATV-10E</td> <td style="text-align: center;">165-175 MHz HIGH GAIN</td> </tr> <tr> <td style="text-align: center;">ATV-8B</td> <td style="text-align: center;">150-163 MHz</td> <td></td> <td></td> </tr> </tbody> </table>		UHF	ATU-6A	400-430 MHz			ATU-6D	450-485 MHz			ATU-6DS	450-485 MHz/3.5"			VHF	ATV-6A	134-151 MHz/3.5"	ATV-8C	161-174 MHz	ATV-6B	150-163 MHz/3.5"	ATV-10A	145-155 MHz HIGH GAIN	ATV-6C	161-174 MHz/3.5"	ATV-10B	150-160 MHz HIGH GAIN	ATV-6XL	VHF UNTUNED	ATV-10C	155-165 MHz HIGH GAIN	ATV-8A	134-151 MHz	ATV-10E	165-175 MHz HIGH GAIN	ATV-8B	150-163 MHz		
UHF	ATU-6A	400-430 MHz																																							
	ATU-6D	450-485 MHz																																							
	ATU-6DS	450-485 MHz/3.5"																																							
VHF	ATV-6A	134-151 MHz/3.5"	ATV-8C	161-174 MHz																																					
	ATV-6B	150-163 MHz/3.5"	ATV-10A	145-155 MHz HIGH GAIN																																					
	ATV-6C	161-174 MHz/3.5"	ATV-10B	150-160 MHz HIGH GAIN																																					
	ATV-6XL	VHF UNTUNED	ATV-10C	155-165 MHz HIGH GAIN																																					
	ATV-8A	134-151 MHz	ATV-10E	165-175 MHz HIGH GAIN																																					
	ATV-8B	150-163 MHz																																							

* B for 120 VAC / C for 230 VAC

CT-116 Radio to Radio Cloning Cable
LCC-820 Leather Case
CLIP-17B Swivel Belt Clip

Various accessories listed may not be available in some countries.

Specifications

VX-820/870 SERIES		
	VHF	UHF
General Specifications		
Frequency Range	134-174 MHz	400-470 MHz 450-512 MHz
Number of Channels	512 (VX-829/824/879/874) / 16 (VX-821/871)	
Number of Groups	32 (VX-829/824/879/874) / 1 (VX-821/871)	
Channel Spacing	12.5 / 20 / 25 kHz	
PLL Steps	1.25 / 2.5 / 5 / 6.25 kHz	5 / 6.25 kHz
Operating Voltage	7.4 VDC ±20 %	
Current Consumption		
STBY (w/save)	75 (30) mA	75 (30) mA
RX	200 mA	200 mA
TX	1.7A	1.9A
Battery Life (w/Battery save) (RX 5 : TX 5 : STBY 90 Duty)	12.5 h (16 h) w/ FNB-V87LI	11.5 h (15 h) w/ FNB-V87LI
Temperature Range	-22° F to + 140° F (-30° C to +60° C)	
Frequency Stability	±2.5 ppm	
Dimensions (W x H x D)	2.3" x 3.8" x 1.5" (57.5 x 96.5 x 37.5 mm)	
Weight (approx.)	10.9 oz (310 g) w/Ant, Battery (FNB-V86LI) and Belt clip	
Receiver Specifications		
Sensitivity (12 dB SINAD) EIA	0.25 / 0.32 µV	
Adj acent Channel Selectivity (W/N)	75 / 70 dB	
Intermodulation (W/N)	75 / 70 dB	
Spurious and Image Rejection	75 dB	
Hum and Noise (W/N)	48 / 42 dB	
Audio Output	700 mW @16 Ohms, 5 % THD	
Transmitter Specifications		
Power Output	5 / 2.5 / 1 / 0.25 W	
Modulation	16K0F3E 11K0F3E	
Spurious Emissions	70 dB	
FM Hum and Noise (W/N)	45 / 40 dB	
Audio Distortion	Less than 3 % @1kHz	

Measurements per EIA standards unless noted above. Specifications are subject to change without notice or obligation.

VX-P820/P870 SERIES		
	VHF	UHF
General Specifications		
Frequency range	134 - 174 MHz	380 - 450 MHz 450 - 512 MHz
Number of Channels	512 (VX-P829/P824/P879/P874) / 16 (VX-P821/P871)	
Number of Groups	32 (VX-P829/P824/P879/P874) / 1 (VX-P821/P871)	
Channel Spacing	12.5 / 20 / 25 kHz	
PLL Steps	1.25 / 2.5 / 5 / 6.25 kHz	5 / 6.25 kHz
Operating Voltage	7.4 VDC ±20 %	
Current Consumption		
STBY (Analog / Digital)	90 / 130 mA	90 / 130 mA
RX	250 mA	250 mA
TX	1.7 A	1.9 A
Battery Life (w/Battery save) (RX 5 : TX 5 : STBY 90 Duty)	10.6h (13.0 h) w/ FNB-V87LI	11.0 h (13.0 h) w/ FNB-V87LI
Temperature Range	-22° F to + 140° F (-30° C to + 60° C)	
Frequency Stability	±2.5 ppm	
Dimensions (W x H x D)	2.3" x 3.8" x 1.5" (57.5 x 96.5 x 37.5 mm)	
Weight (approx.)	10.9 oz (310 g) w/Ant, Battery (FNB-V86LI) and Belt Clip	
Receiver Specifications Measurements made per TIA/EIA-603 (Analog), TIA-102 CAAA (Digital)		
Sensitivity (12 dB SINAD) EIA	0.25 µV	0.32 µV
Digital 5% BER	0.25 µV	0.32 µV
Digital 1% BER	0.35 µV	0.40 µV
Adj acent Channel Selectivity Analog (W/N)	75 / 70 dB	
Intermodulation Analog (W/N)	75 / 70 dB	
Spurious and Image Rejection Analog	75 dB	
Hum and Noise Analog (W/N)	48 / 42 dB	
Audio Output	700 mW @16 Ohms, 5% THD	
Transmitter Specifications Measurements made per TIA/EIA-603 (Analog), TIA-102 CAAA (Digital)		
Power Output	5 / 2.5 / 1 / 0.25 W	
Modulation Analog (W/N)	16K0F3E / 11K0F3E	
Digital	8K10F1D / 8K10F1E	
Spurious Emissions	70 dB	
FM Hum and Noise Analog (W/N)	46 / 40 dB	
Audio Distortion	Less than 3 % @1kHz	

VX-820/P820 Series : Applicable International Protection Standard



VX-870/P870 Series : Applicable International Protection Standard



VX-820/870/P820/P870 Series : Applicable MIL-STD

Standard	MIL 810C Methods/Procedures	MIL 810D Methods/Procedures	MIL 810E Methods/Procedures	MIL 810F Methods/Procedures
Low Pressure	500.1/Procedure I, II	500.2/Procedure I, II	500.3/Procedure I, II	500.4/Procedure I, II
High Temperature	501.1/Procedure I, II	501.2/Procedure I, II	501.3/Procedure I, II	501.4/Procedure I, II
Low Temperature	502.1/Procedure I, II	502.2/Procedure I, II	502.3/Procedure I, II	502.4/Procedure I, II
Temperature Shock	-	-	-	503.4/Procedure I
Solar Radiation	505.1/Procedure I	505.2/Procedure II Cat. A1	505.3/Procedure II Cat. A1	505.4/Procedure I, II Cat. A1
Rain	506.1/Procedure I	506.2/Procedure I	506.3/Procedure I, II	506.4/Procedure I
Humidity	507.1/Procedure I, II	507.2/Procedure II, III	507.3/Procedure II, III	-
Salt Fog	509.1/Procedure I	509.2/Procedure I	509.3/Procedure I	509.4/Procedure I
Dust	510.1/Procedure I	510.2/Procedure I	510.3/Procedure I	510.4/Procedure I, III
Immersion*	512.1/Procedure I	512.2/Procedure I	512.3/Procedure I	512.4/Procedure I
Vibration	514.2/Procedure I Cat. 10, 8	514.3/Procedure I Cat. 10	514.4/Procedure I Cat. 10	514.5/Procedure I Cat. 20, 24
Shock	516.2/Procedure I	516.3/Procedure I	516.4/Procedure I	516.5/Procedure I

* VX-870 / P870 Series

Intrinsically Safe Information

The Intrinsically Safe Version of VX-820/870/P820/P870 series, equipped with any of optional units, meets the requirements of ANSI/UL913 6th Edition for Class I, Division 1, Groups A-D; Class II, Groups E-G; and Class III for hazardous locations.

ISO9001:2000



YAESU MUSEN CO., LTD
ISO9001:2000 certification

ISO14001:2004



YAESU MUSEN CO., LTD
ISO14001:2004 certification



Vertex Standard
US Headquarters

10900 Walker Street, Cypress, CA 90630, U.S.A.
Phone 714/827-7600; Fax 714/827-8100
<http://www.vertexstandard.com>